

# STANDARD SPECIFICATIONS

## MODEL CX20

## MODEL CX24

**BODY LENGTH** CX20 - 20' long; CX24 - 24' long.

**OVERALL WIDTH** 8 feet.

**INSIDE HEIGHT** 83". **OUTSIDE HEIGHT** 96".

**AXLES** Heavy-duty commercial quality; two 5,200 pound capacity.

**SUSPENSION** Tandem 5-leaf springs.

**WHEELS** 15" by 6" one-piece 6 hole with 5-1/2" bolt circle.

**TIRES** Four ST225/75R(D) 15" radial blackwalls.

**BRAKES** Electric drum type on all wheels; 12 volt, 12" by 2", with breakaway switch wired in. (require tow vehicle controller - *not* supplied with trailer).

**FRONT JACK** 5,000 pound sidewind type recessed into front bumper, with sand flange.

**REAR JACKS** Two 5,000 pound sidewind type recessed into rear bumper, with sand flange.

**COUNTERTOPS** 16" wide painted steel across both sides and rear of trailer. CX20 - 45' total length; CX24 - 53' total length. (*Width modified for factory-installed options*).

**COUNTER HEIGHT** 34" inside, 47" outside.

**OVERHEAD SHELVES** 9" wide located above both side serving windows. CX20 - 40' total length; CX24 - 48' total length.

**LIGHTS/BRAKES RECEPTACLE** 6-way, 12 volt.

**G.V.W.R.** 10,000 pounds.

**SCALE WEIGHT** CX20 - 5,300 pounds; CX24 - 6,200 pounds.

**TONGUE WEIGHT** Maximum 1,000 pounds.

**PAYLOAD CAPACITY** CX20 - maximum 4,700 pounds; CX24 - maximum 3,800 pounds.

**HITCH HEIGHT** Approximately 19" to top of ball (varies with amount of load).

**RECOMMENDED TOW VEHICLE** 1 ton truck or van with 400 cubic inch engine minimum.  
(*larger than 1 ton requires AIRSAFE™ or equivalent hitch*)

**FRAME** Heavy-duty all welded tubular steel.

**BODY CONSTRUCTION** Welded 14 gauge formed steel with integral counters.

**ROOF** Welded 14 gauge formed steel, crossbroke, reinforced and silicone sealed, with mansard style and awnings to shed water.

**SERVING WINDOWS** Four 38" by 112" (sides); one 38" by 82" (rear); all window awnings 16 gauge steel with outward crossbreak.

**AWNING SUPPORTS** 3/4" steel rod with rubber tips to protect finish.

**ENTRANCE DOOR** One 25" by 70" with outward crossbreak and chrome "T" handle with lock and key.

**FLOOR** 1/8" steel safety treadplate with drop construction for low 13" inside floor height.

**HITCH** Forged steel 2-5/16" ball coupler with positive lock collar & pin.

**TONGUE** 3" square tube steel, removable by pulling one hitch pin.

**LIGHTS** Sealed beam type, wiring run through frame for protection; meet DOT/ICC requirements.

**PAINT** Two coats of white enamel over rust-inhibitive primer.

**TRIM** Chrome hub caps with chrome wheel well edge guard.

**INSIDE LIGHTING** Two 120 volt fluorescent fixtures with two dual pin 40 watt, 48" fluorescent bulbs, one mounted above entrance door and one mounted above rear counter, controlled by wall-mounted switch.

**INSIDE ELECTRICAL** Two three-prong 15 amp, 120 volt duplex receptacles connected via 15 amp male motor base plug mounted on outside, with load center and 15 amp breaker; all components *UL Listed* and installed in accordance with the National Electrical Code.


**CLEANUP** All-metal construction with two drainholes in rear of trailer provides for quick and easy washout.

Due to our policy of ongoing improvements, our designs and specifications are subject to change without notice.

# DIMENSIONAL DIAGRAMS

## MODEL CX20

## MODEL CX24

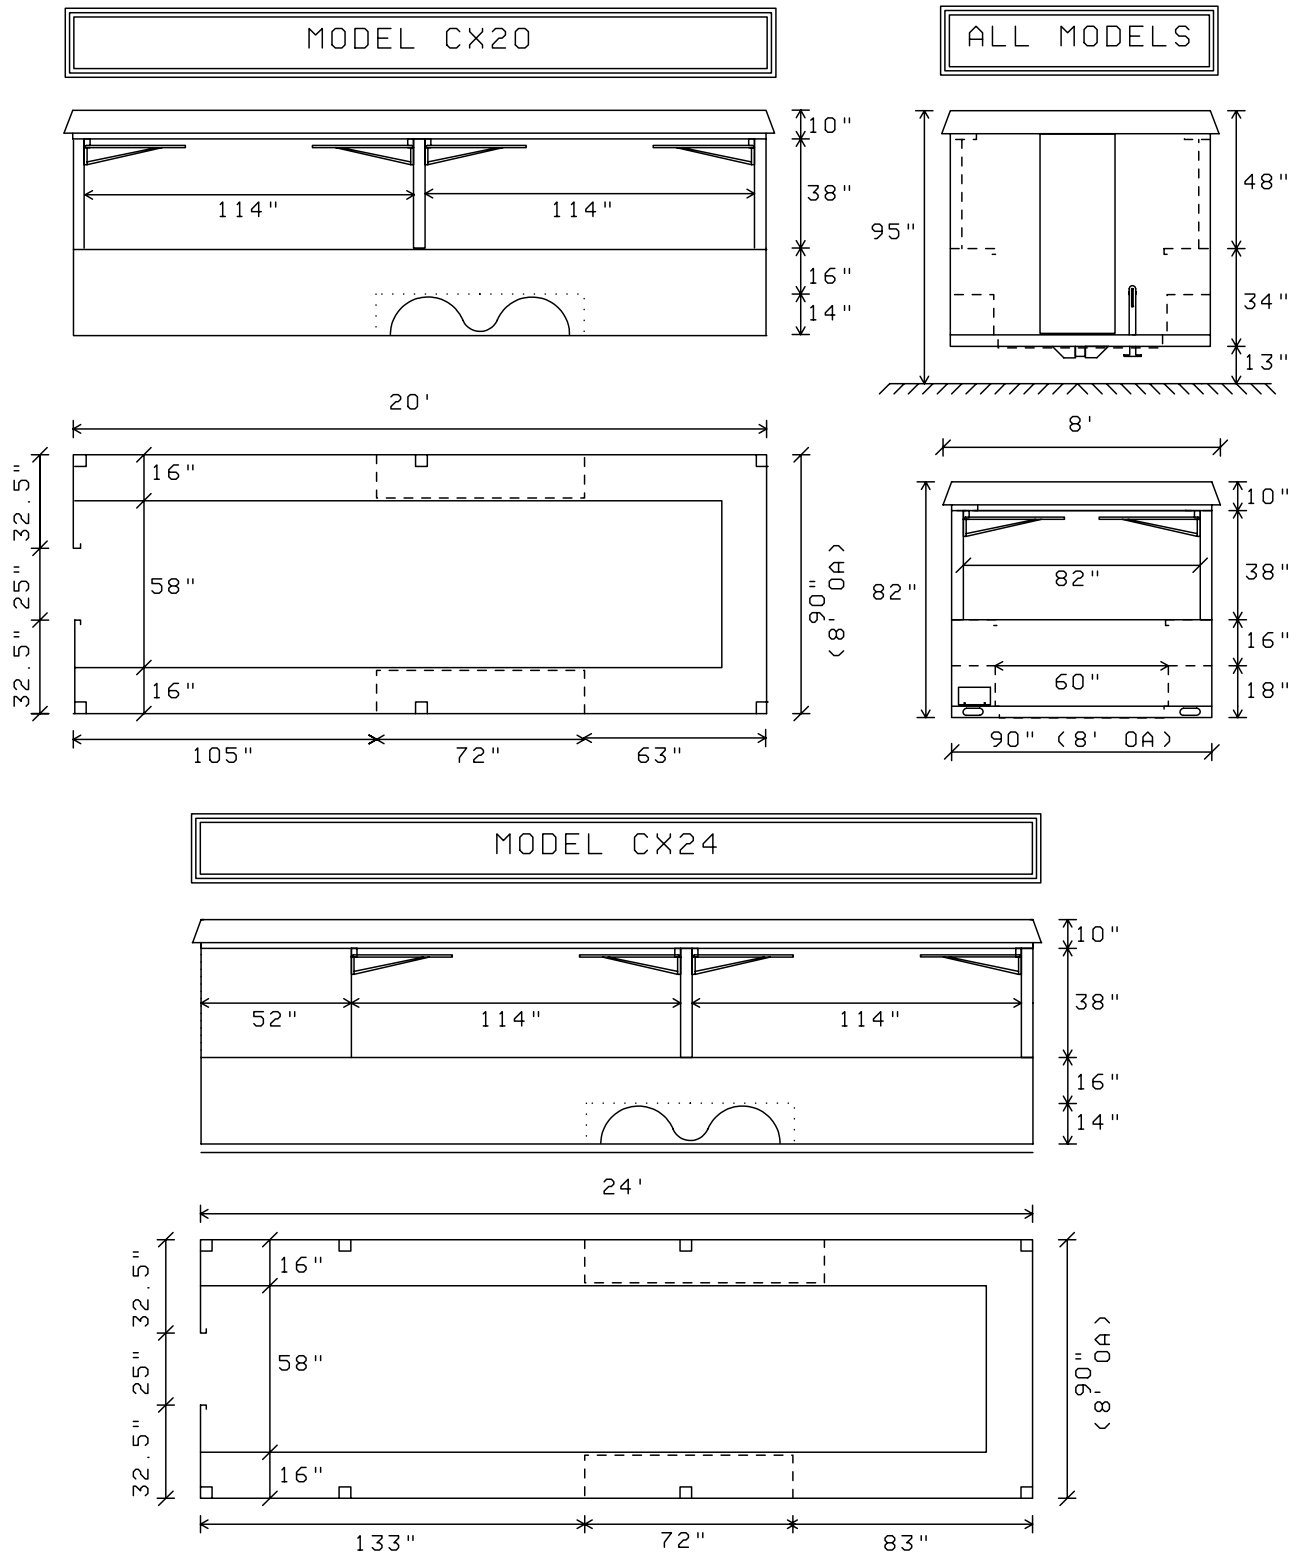

Due to our policy of ongoing improvements, our designs and specifications are subject to change without notice.